


Synology FlashStation FX2421 Expansion Unit

Storage enclosure - 24 bays (SATA-600 / SAS) - rack-mountable

Group	Storage
Manufacturer	Synology
Manufacturer item no.	FX2421
EAN/UPC	4711174724017

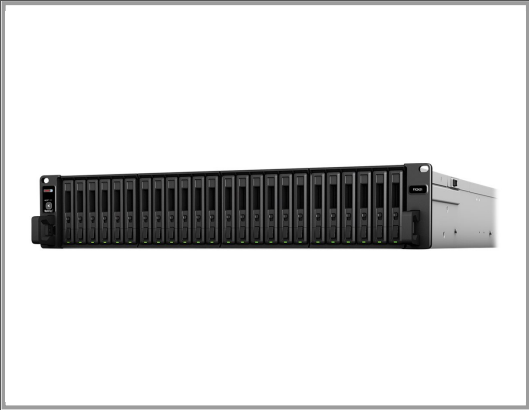

Description

Synology FX2421 expansion units for Synology FlashStation make it easy to upgrade your all-flash storage space with Synology enterprise SSD. Each 2U rackmount unit lets you add 24 additional 2.5" drive bays on the fly using an expansion cable. Synology FX2421 24 bay expansion unit allows you to create a highly reliable and integrated storage setup, and receive long-term Synology updates and support.

Main features

Product Description	Synology FlashStation FX2421 Expansion Unit - storage enclosure
Device Type	Storage enclosure
Enclosure Type	Rack-mountable
Max Supported Capacity	92.16 TB
Installed Devices / Modules Qty	0 (installed) / 24 (max)
Supported Drives	SATA-600 / SAS
Built-in Devices	Led panel
Hard Drive	No HDD
Power	AC 120/230 V - 50/60 Hz
Power Redundancy	Yes
Dimensions (WxDxH)	43.05 cm x 69.2 cm x 8.8 cm
Weight	14.5 kg

Extended details

	General
Device Type	Storage enclosure
Enclosure Type	Rack-mountable
	Chassis
Built-in Devices	Led panel
Installed Devices / Modules Qty	0
Supported Devices / Modules Qty	24
Supported Drives	SATA-600 / SAS
	Storage

Max Supported Capacity	92.16 TB
Processor	
CPU	No CPU
Hard Drive	
Type	No HDD
Expansion / Connectivity	
Expansion Bays	24 (total) / 24 (free) x hot-swap - 2.5"
Interfaces	SAS (input) SAS (output)
Miscellaneous	
Features	Built-in 4 cooling fans
Cables Included	1 x mini SAS HD cable
Compliant Standards	UL, RoHS
Included Accessories	Accessory pack
Power	
Power Device	Internal power supply
Power Redundancy	Yes
Voltage Required	AC 120/230 V - 50/60 Hz
Power Consumption Operational	190.99 Watt
Power Provided	500 Watt
Dimensions & Weight	
Width	43.05 cm
Depth	69.2 cm
Height	8.8 cm
Weight	14.5 kg
Manufacturer Warranty	
Service & Support	Limited warranty - 5 years
Environmental Parameters	
Min Operating Temperature	0 °C
Max Operating Temperature	35 °C
Humidity Range Operating	5 - 95%
Sound Emission	57 dBA

Technical data © 1WorldSync. Subject to technical modifications and errors.