


HPE Aruba - SFP (mini-GBIC) transceiver module

GigE - 1000Base-SX - LC multi-mode - up to 500 m - for OfficeConnect 1820; HPE Aruba 2930F 12 - 2930F 8G - 2930M 40 - 6300 - 6405 48 - 6405 96 - 64XX

Group	Network Equipment
Manufacturer	HPE
Manufacturer item no.	J4858D
EAN/UPC	0190017245836

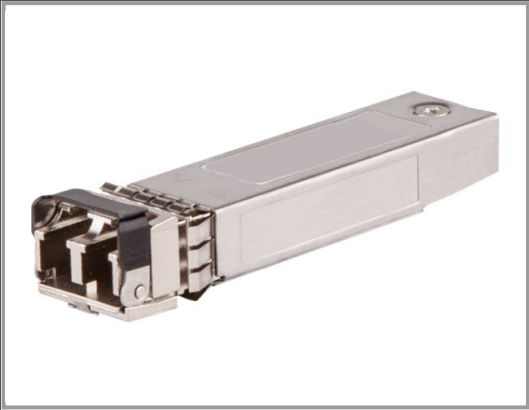

Description

HPE Aruba - SFP (mini-GBIC) transceiver module - GigE - 1000Base-SX - LC multi-mode - up to 500 m - for OfficeConnect 1820; HPE Aruba 2930F 12, 2930F 8G, 2930M 40, 6300, 6405 48, 6405 96, 64XX

Main features

Product Description	HPE Aruba - SFP (mini-GBIC) transceiver module - GigE
Device Type	SFP (mini-GBIC) transceiver module - LC multi-mode
Form Factor	Plug-in module
Cabling Type	1000Base-SX
Data Transfer Rate	1 Gbps
Data Link Protocol	GigE
Max Transfer Distance	500 m
Dimensions (WxDxH)	1.5 cm x 5.3 cm x 1.3 cm
Weight	20 g
Designed For	OfficeConnect 1820; HPE Aruba 2530, 2540 24, 2540 48, 2620, 2930F 12, 2930F 24, 2930F 48, 2930F 8G, 2930M 24, 2930M 40, 2930M 48, 3810M 24, 3810M 40, 3810M 48, 5406R 16, 5406R 44, 5406R 8-port, 5406R zl2, 5412R 92, 5412R zl2, 54XX, 6300, 6405 48, 6405 96, 64XX, 70XX, 72XX, 83XX, 8400 8-slot

Extended details

General	
Device Type	SFP (mini-GBIC) transceiver module
Form Factor	Plug-in module
Networking	
Connectivity Technology	Wired
Cabling Type	1000Base-SX
Data Link Protocol	GigE
Data Transfer Rate	1 Gbps

Max Transfer Distance	500 m
	Expansion / Connectivity
Interfaces	1 x Ethernet 1000Base-SX - LC multi-mode
	Miscellaneous
Compliant Standards	OM2
	Dimensions & Weight
Width	1.5 cm
Depth	5.3 cm
Height	1.3 cm
Weight	20 g
	Compatibility Information
Designed For	HPE OfficeConnect 1820-24G-PoE+ (185W), 1820-48G, 1820-48G-PoE+ (370W) HPE Aruba 2930F 12G PoE+ 2G/2SFP+, 2930F 8G PoE+ 2SFP+ TAA, 2930M 24 Smart Rate POE+ 1-Slot, 2930M 24G 1-Slot, 2930M 24G POE+ 1-Slot, 2930M 40G 8 HPE Smart Rate PoE Class 6 1-slot Switch, 2930M 40G 8 HPE Smart Rate PoE+ 1-slot Switch, 2930M 48G 1-Slot, 2930M 48G POE+ 1-Slot, 3810M 24SFP+ 250W, 3810M 48G PoE+ 4SFP+ 1050W, 3810M 48G PoE+ 4SFP+ 680W, 6300F, 6300M, 6405 48SFP+ 8SFP56, 6405 96G CL4 PoE 4SFP56, 6405 Switch Bundle, 6410, 6410 Switch Bundle, 7005 (IL) FIPS/TAA-compliant Controller, 7005 (JP) Controller, 7005 (JP) FIPS/TAA Controller, 7005 (RW) FIPS/TAA-compliant Controller, 7005 (US) FIPS/TAA Controller, 7005 Cloud Service Controller, 7010 (IL) Controller, 7010 (JP) FIPS/TAA Controller, 7010 (RW) FIPS/TAA-compliant Controller, 7024 (JP) FIPS/TAA Controller, 7024 (RW) FIPS/TAA-compliant Controller, 7024 (US) Controller, 7024 (US) FIPS/TAA Controller, 7030 (JP) Controller, 7030 (JP) FIPS/TAA Controller, 7030 (RW) FIPS/TAA-compliant Controller, 7030 (US), 7030 (US) Controller, 7030 (US) FIPS/TAA Controller, 7205 (IL) FIPS/TAA-compliant Controller, 7205 (JP) Controller, 7205 (JP) FIPS/TAA Controller, 7205 (RW) FIPS/TAA-compliant Controller, 7205 (US), 7205 (US) Controller, 7205 (US) FIPS/TAA Controller, 7210 (JP) FIPS/TAA Controller, 7210 (RW) FIPS/TAA-compliant Controller, 7210 (US), 7210 (US) FIPS/TAA Controller, 7210DC (JP) Controller, 7210DC (US) Controller, 7220 (JP) Controller, 7220 (RW) FIPS/TAA-compliant Controller, 7220 (US) FIPS/TAA Controller, 7220DC (IL) Mobility Controller, 7220DC (US) Controller, 7240 (JP) FIPS/TAA Controller, 7240 (RW) FIPS/TAA-compliant Controller, 7240 (US) FIPS/TAA Controller, 7240XM (IL) FIPS Controller, 7240XM (JP) FIPS/TAA Controller, 7240XM (RW) FIPS Controller, 7240XM (US) Controller, 7240XM (US) FIPS Controller, 7240XM (US) FIPS/TAA Controller, 8320, 8325-32C, 8325-48Y8C, 8400 8-slot Chassis

Technical data © 1WorldSync. Subject to technical modifications and errors.