


HP Color LaserJet Enterprise M751dn

Printer - colour - Duplex - laser - A3/Ledger - 600 x 600 dpi - up to 41 ppm (mono) / up to 41 ppm (colour) - capacity: 650 sheets - USB 2.0 - Gigabit LAN - USB host (internal) - USB 2.0 host

Group	Printers
Manufacturer	HP
Manufacturer item no.	T3U44A#B19
EAN/UPC	0192018848016

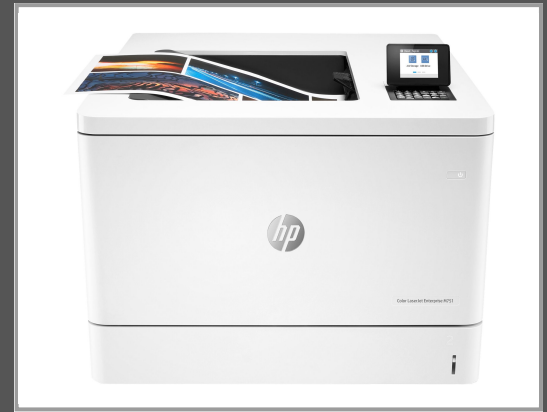

Description

HP LaserJet printers power office productivity with a smart, streamlined design that's reliable and hassle-free. Count on premium quality, maximum uptime, and strong security - all intended to drive successful organizations forward.

Main features

Product Description	HP Color LaserJet Enterprise M751dn - printer - colour - laser
Printer Type	Workgroup printer - laser - colour
Weight	45.1 kg
Localisation	English, German, French, Italian, Spanish / Europe
Media Size Class	A3/Ledger
Max Media Size	320 x 457.2 mm
Min Media Size (Custom)	64 mm x 127 mm
Max Media Size (Custom)	320 mm x 457.2 mm
Print Speed	Up to 41 ppm - black normal - A4 (210 x 297 mm) ; Up to 41 ppm - colour normal - A4 (210 x 297 mm) ; Up to 41 ppm - black normal - ANSI A (Letter) (216 x 279 mm) ; Up to 41 ppm - colour normal - ANSI A (Letter) (216 x 279 mm) ; Up to 26 ppm - B/W - A3 (297 x 420 mm) ; Up to 26 ppm - colour - A3 (297 x 420 mm) ; Up to 41 ppm - B/W duplex - A4 (210 x 297 mm) ; Up to 18 ppm - colour duplex - A3 (297 x 420 mm) ; Up to 18 ppm - duplex - Tabloid (279 x 432 mm) ; Up to 26 ppm - black normal - Tabloid (279 x 432 mm) ; Up to 26 ppm - colour normal - Tabloid (279 x 432 mm)
Max Resolution (B&W)	600 x 600 dpi
Max Resolution (Colour)	600 x 600 dpi
Image Enhancement Technology	HP ImageREt 4800
Automatic Duplexing	Yes
Interface	USB 2.0, Gigabit LAN, USB host (internal), USB 2.0 host
AirPrint Enabled	Yes
Preview Screen Size	2.7"
Processor	1.2 GHz
RAM Installed (Max)	1.5 GB (2 GB) - DDR3 SDRAM - SO-DIMM 144-pin
Language Simulation	PCL 5, PostScript 3, PCL 6, PDF 1.4

Media Type	Envelopes, transparencies, labels, plain paper, recycled paper, card stock, extra heavy-weight paper, light-weight paper, glossy paper
Total Media Capacity	650 sheets
Media Handling	100-sheet multipurpose tray, 550-sheet input tray
Monthly Duty Cycle (max)	150000 pages
Recommended Monthly Volume	40000 pages
Networking	Print server
Printer Features	Hardware integration pocket, Hard Disk Drive Encryption, Instant-on Technology, Auto Power On, Auto Power Off
System Requirements	SunSoft Solaris 2.5 or later, IBM AIX 3.2.5 or later, HP MPE/iX, HP-UX 11i, Novell NetWare 6, Novell NetWare 6.5, Microsoft Windows XP 64-bit Edition SP2 or later, Microsoft Windows XP SP2 or later, Novell Open Enterprise Server, Citrix Presentation Server 4.5, Apple MacOS X 10.5, Citrix Presentation Server 4.0, Microsoft Windows Vista (32/64 bits), Microsoft Windows Server 2003 R2 (32/64-bits), Microsoft Windows 7 (32/64 bits), Microsoft Windows Server 2003 (32/64-bits) SP2, Microsoft Windows Server 2003 (32/64-bits) SP1, Microsoft Windows Server 2008 (32/64-bits) SP1, Microsoft Windows Server 2008 (32/64-bits) SP2, Citrix XenServer 5.6, Apple MacOS X 10.6.8, Citrix XenApp 6, Red Hat Linux 7.x or later, SuSE Linux 8.x or later, Citrix XenDesktop 5.5, Windows 8 (32/64 bits), Microsoft Windows Server 2008 R2 (32/64-bits), Apple MacOS X 10.8.x, Windows 8 Pro (32/64 bits), Microsoft Windows Server 2012 x64 Edition, Windows 8.1 (32/64 bits), Microsoft Windows Server 2012 R2, Apple MacOS X 10.7.5, Apple MacOS X 10.9.x
Environmental Standards	EPEAT Silver
Dimensions (WxDxH)	55.6 cm x 58.9 cm x 39.9 cm

Extended details

	General
Printer Type	Workgroup printer - laser - colour
Localisation	English, German, French, Italian, Spanish / Europe
	Printer
Print Speed	Up to 41 ppm - black normal - A4 (210 x 297 mm) Up to 41 ppm - colour normal - A4 (210 x 297 mm) Up to 41 ppm - black normal - ANSI A (Letter) (216 x 279 mm) Up to 41 ppm - colour normal - ANSI A (Letter) (216 x 279 mm) Up to 26 ppm - B/W - A3 (297 x 420 mm) Up to 26 ppm - colour - A3 (297 x 420 mm) Up to 41 ppm - B/W duplex - A4 (210 x 297 mm) Up to 18 ppm - colour duplex - A3 (297 x 420 mm) Up to 18 ppm - duplex - Tabloid (279 x 432 mm) Up to 26 ppm - black normal - Tabloid (279 x 432 mm) Up to 26 ppm - colour normal - Tabloid (279 x 432 mm)
Built-in Devices	Numeric key pad, LCD display
Preview Screen Size	2.7"
Connectivity Technology	Wired
Interface	USB 2.0, Gigabit LAN, USB host (internal), USB 2.0 host
AirPrint Enabled	Yes
Max Resolution (B&W)	600 x 600 dpi
Max Resolution (Colour)	600 x 600 dpi
Image Enhancement Technology	HP ImageREt 4800
Automatic Duplexing	Yes

PostScript Support	Included
First Print Out Time B/W	5.7 sec
First Print Out Time Colour	6.1 sec
Language Simulation	PCL 5, PostScript 3, PCL 6, PDF 1.4
Fonts Included	105 x TrueType 92 x scalable PostScript
Printer Features	Hardware integration pocket, Hard Disk Drive Encryption, Instant-on Technology, Auto Power On, Auto Power Off
Media Handling	100-sheet multipurpose tray, 550-sheet input tray
Processor	
Processor	1.2 GHz
RAM	
RAM Installed (Max)	1.5 GB / 2 GB (max)
Technology / Form Factor	DDR3 SDRAM - SO-DIMM 144-pin
Slots Qty	1
Media Handling	
Media Type	Envelopes, transparencies, labels, plain paper, recycled paper, card stock, extra heavy-weight paper, light-weight paper, glossy paper
Media Size Class	A3/Ledger
Max Media Size	320 x 457.2 mm
Min Media Size (Custom)	64 mm x 127 mm
Max Media Size (Custom)	320 mm x 457.2 mm
Media Sizes	ANSI A (Letter) (216 x 279 mm), Legal (216 x 356 mm), Executive (184 x 267 mm), A4 (210 x 297 mm), A5 (148 x 210 mm), A3 (297 x 420 mm), A6 (105 x 148 mm), ARCH B (304.8 x 457.2 mm), 297 x 432 mm, JIS B5 (182 x 257 mm), JIS B4 (257 x 364 mm), SRA3 (320 x 450 mm), SRA4 (225 x 320 mm), 101.6 x 152.4 mm, 197 x 273 mm, 76 x 127 mm, 76.2 x 127 mm, RA3 (305 x 430 mm), 127 x 177.8 mm, 279.4 x 431.8 mm, 215.9 x 330.2 mm, 127 x 203.2 mm, JIS B6 (128 x 182 mm), RA4 (215 x 305 mm), 270 x 390 mm, 260 x 368 mm, 273 x 394 mm, 195 x 270 mm, 184 x 260 mm, 148 x 211 mm
Envelope Sizes	International DL (110 x 220 mm), International C6 (114 x 162 mm), International C5 (162 x 229 mm), International B5 (176 x 250 mm)
Media Weight	60 g/m ² - 300 g/m ²
Total Media Capacity	650 sheets
Media Feeders	Input tray: 1 x automatic - 100 sheets - 320 x 457.2 mm weight: 60 g/m ² - 300 g/m ² Input tray: 1 x automatic - 550 sheets - 297 x 431.8 mm weight: 60 g/m ² - 256 g/m ² Output tray: 1 x automatic - 250 sheets - 320 x 457.2 mm weight: 60 g/m ² - 256 g/m ²
Max Media Capacity	4450 sheets
Output Trays Capacity	250 sheets
Duty Cycle	
Monthly Duty Cycle (max)	150000 pages
Recommended Monthly Volume	40000 pages
Networking	
Networking	Print server

Network Controller Name	HP Jetdirect
Remote Management Protocol	SNMP 1, Telnet, SNMP 3, IPP, SNMP 2c, HTTP, HTTPS, TFTP, IPPS, ICMP, DHCP, IPv4, IPv6
Security Protocols & Features	Kerberos, SSL, Apple Bonjour, TLS, IPsec, 802.1x, EAP-TLS, PEAP, WPA2-Enterprise
	Expansion / Connectivity
Connections	1 x USB 2.0 - 4 pin USB Type B 2 x USB 2.0 host - 4 pin USB Type A 1 x USB host (internal) - 4 pin USB Type A 1 x Gigabit LAN - RJ-45
	Miscellaneous
Consumables Included	1 x toner cartridge (black) 1 x toner cartridge (cyan) 1 x toner cartridge (magenta) 1 x toner cartridge (yellow)
Features	Security lock slot (cable lock sold separately), SNMP support
Compliant Standards	GS, FIPS 140-2, EN 62479:2010, EN 61000-3-3:2013, EN 55024:2010, CISPR 22:2008, EMC 2014/30/EU, EN 61000-3-2:2014, IEC 60950-1:2005 + A1:2009 + A2:2013, IEC 62479:2010, LVD 2014/35/EU, EN60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013, ICES-003 issue 6 Class A, CISPR 32:2012 Class A, EN 55032:2012 Class A, EN 60825-1:2014, IEC 60825-1:2014
Security Slot Type	Kensington security slot
	Power
Power Device	Power supply - internal
Frequency Required	50/60 Hz
Power Consumption Operational	870 Watt
Power Consumption Stand by	48 Watt
Power Consumption Sleep	0.6 Watt
	Software / System Requirements
Software Included	Drivers & Utilities, HP Web JetAdmin, HP Printer Assistant, HP Device Toolbox
OS Required	SunSoft Solaris 2.5 or later, IBM AIX 3.2.5 or later, HP MPE/iX, HP-UX 11i, Novell NetWare 6, Novell NetWare 6.5, Microsoft Windows XP 64-bit Edition SP2 or later, Microsoft Windows XP SP2 or later, Novell Open Enterprise Server, Citrix Presentation Server 4.5, Apple MacOS X 10.5, Citrix Presentation Server 4.0, Microsoft Windows Vista (32/64 bits), Microsoft Windows Server 2003 R2 (32/64-bits), Microsoft Windows 7 (32/64 bits), Microsoft Windows Server 2003 (32/64-bits) SP2, Microsoft Windows Server 2003 (32/64-bits) SP1, Microsoft Windows Server 2008 (32/64-bits) SP1, Microsoft Windows Server 2008 (32/64-bits) SP2, Citrix XenServer 5.6, Apple MacOS X 10.6.8, Citrix XenApp 6, Red Hat Linux 7.x or later, SuSE Linux 8.x or later, Citrix XenDesktop 5.5, Windows 8 (32/64 bits), Microsoft Windows Server 2008 R2 (32/64-bits), Apple MacOS X 10.8.x, Windows 8 Pro (32/64 bits), Microsoft Windows Server 2012 x64 Edition, Windows 8.1 (32/64 bits), Microsoft Windows Server 2012 R2, Apple MacOS X 10.7.5, Apple MacOS X 10.9.x
System Requirements Details	Windows XP/Vista/7/8/2003/2008/2012 - HD 2 GB MacOS X 10.6.8/10.7.5/10.8 - HD 2 GB
	Environmental Standards
EPEAT Compliant	EPEAT Silver
Blue Angel	Yes
ENERGY STAR	Yes
	Manufacturer Warranty
Service & Support	Limited warranty - 1 year - on-site - response time: next business day

Environmental Parameters	
Min Operating Temperature	10 °C
Max Operating Temperature	32.5 °C
Humidity Range Operating	30 - 70%
Sound Emission (Operating)	51 dBA
Dimensions & Weight	
Width	55.6 cm
Depth	58.9 cm
Height	39.9 cm
Weight	45.1 kg
Dimensions & Weight (Shipping)	
Width (Shipping)	78.6 cm
Depth (Shipping)	73.6 cm
Height (Shipping)	55.8 cm
Weight (Shipping)	52.9 kg

Technical data © 1WorldSync. Subject to technical modifications and errors.