


DIGITUS Slim - Patch cable - RJ-45 (M) to RJ-45 (M)

25 cm - 3.65 mm - U/FTP - CAT 6 - booted - halogen-free - molded - snagless - grey

Group	Cables & Adapters
Manufacturer	DIGITUS
Manufacturer item no.	DK-1624-0025S
EAN/UPC	4016032467861

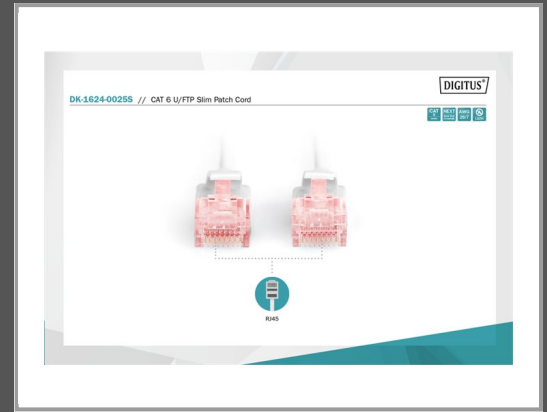

Description

DIGITUS Slim patch cords are characterized by their small outer diameter and flexible sheath. Slim design enables versatile use in your network. Moreover, the DIGITUS Category 6 Class E patch cords are manufactured and tested to the ISO/IEC 11801 and DIN EN 50173 Category 6 specifications. They will guarantee the installed cabling system is compliant with the ISO and EN channel specification requirements and will provide optimum performance levels of DIGITUS Category 6 cabling. The performance is tested up to 250 MHz inclusive performance characteristics such as near end cross talk ("NEXT"). DIGITUS patch cords are designed and produced to fulfill the highest requirements of various application areas in full volume. Each cable is fitted with a molded boot which comes with kink protection and strain relief. Furthermore, the boot is equipped with a latch protection that prevents the latching lever against breaking.

Main features

Product Description	DIGITUS Slim - patch cable - 25 cm - grey
Type	Patch cable - CAT 6
Technology	U/FTP
Wires per Cable	8 wires
Features	Booted, halogen-free, molded, snagless, Slim, flame retardant, Anti-kink sleeve, shielded connectors, strain relief, length indication, copper conductors, bending radius 4D
Length	25 cm
Diameter	3.65 mm
Connector	RJ-45 - male
Connector (Second End)	RJ-45 - male
Colour	Grey

Extended details

General	
Network Cable Type	Patch cable - CAT 6
Technology	U/FTP
Jacket Material	Low Smoke Zero Halogen (LSZH)
American Wire Gauge (AWG)	28/7
Wires per Cable	8 wires

Pairs per Cable	4 pairs
Features	Booted, halogen-free, molded, snagless, Slim, flame retardant, Anti-kink sleeve, shielded connectors, strain relief, length indication, copper conductors, bending radius 4D
Length	25 cm
Diameter	3.65 mm
Colour	Grey
	Connectivity
Connector	RJ-45 - male
Connector (Second End)	RJ-45 - male
	Miscellaneous
Compliant Standards	ISO/IEC 11801, EN 50173 - up to 250 MHz

Technical data © 1WorldSync. Subject to technical modifications and errors.