



P14 Silent

Pressure-optimised Extra Quiet 140 mm Fan

- Optimised for static pressure
- Ideal choice on heatsinks, radiators and (partly-) covered case vents
- Push- or pull-configuration possible
- Virtually silent motor, developed in Germany



P14 Silent

Pressure-optimised Extra Quiet 140 mm Fan

The **P14 Silent** fan features completely redesigned fan blades and is optimised for high static pressure. Thus, the **P14 Silent** is especially effective when used on heatsinks and with higher air resistance. The motor of the fan was developed in Germany and is virtually silent.




Specifications	
Fan	140 mm, 950 RPM
Airflow	29.8 CFM/50.66 m ³ /h (@950 RPM)
Static Pressure	0.6 mm H ₂ O (@950 RPM)
Bearing	Fluid Dynamic Bearing
Noise Level	0.08 Sone (@950 RPM)
Voltage/Current	0.05 A/12 V DC
Connector	3-pin Connector
Dimensions	140 (L) x 140 (W) x 27 (H) mm
Weight	191 g



Optimised for Static Pressure

During the development of the new P14 Silent, special emphasis was placed on a focused airstream and thus a high static pressure. The fan guarantees extremely efficient cooling, even with increased air resistance. Therefore, the P14 Silent is particularly suitable for use on heatsinks and radiators.

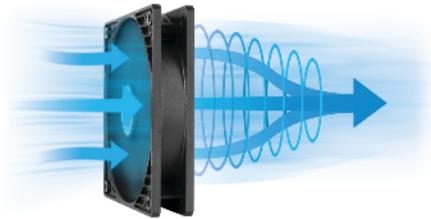

Virtually silent motor

At low fan speed, the motor is the main source of unwanted noise. A motor developed in Germany with an enhanced bearing reduces friction and noise.



High Quality Bearing

Thanks to an alloy/lubricant combination developed in Germany, friction within the bearing is reduced and greater efficiency is achieved. As a result, there is less heat development as well as less bearing noise, which means you can enjoy a longer service life from your fan.

